



Home Comfort

FRA226ST2

Heavy-Duty Air Conditioner



Product Dimensions

| | |
|--------|---------|
| Height | 18-5/8" |
| Width | 26-1/2" |
| Depth | 26-1/2" |

More Easy-To-Use Features

Energy and Cost Savings

The unit operates at a low voltage – conserving energy and saving you money.

Multi-Speed Fan

Features three different fan speeds, for more cooling flexibility.

Sleep Mode

Quiet operation keeps you cool without keeping you awake. Plus, Sleep Mode gradually increases room temperature after being activated.

Quickly Cools

Comfort Control Design

Easily control the direction of your cool air, wherever your unit is.

Effortless™ Restart

Automatically resumes operating at its previous settings when power is restored to your unit.

Clean Filter Alert

Power Cord

Comes with an extra long three-prong cord that makes extension cords unnecessary.

SpaceWise™ Adjustable Design

Optional Side Panels extend so you can adjust your unit to fit your window.

24 Hour On/Off Timer

ENERGY STAR®



| Performance | BTUs |
|-------------|-----------------|
| Cool | 22,000 / 21,600 |

Signature Features

Effortless™ Remote Temperature Control

A thermostat located on your air conditioner's remote control precisely maintains preset room temperature, so you will remain comfortable at all times.

Remote Control

Allows you to precisely control the temperature and fan speed from across the room.



Ready-Select™ Controls

Easily select options with the touch of a button.

Effortless™ Clean Filter

Our anti-microbial filter cleans the air, removing harmful bacteria.

| | |
|----------------------------------|-----------------------------|
| Performance | |
| BTU (Cool) | 22,000/21,600 |
| Dehumidification (Pints/Hour) | 7.2 |
| Cool Area (Sq. Ft.) | 1,435 |
| Energy Efficiency Ratio | 9.4 |
| Electrical | |
| Volts | 230/208 |
| Amps (Cool) | 10.8/11.3 |
| Watts (Cool) | 2,340/2,300 |
| Length of Power Cord (Min./Max.) | 5'/6' |
| Plug Type (NEMA)* | LCDI (B) |
| Features | |
| Electronic Controls | Ready-Select™ Controls |
| Fan Speeds (Cool/Fan) | 3/3 |
| Low Voltage Start-Up | Yes |
| Auto Cool Function | Yes |
| Energy Save | Yes |
| Sleep Mode | Yes |
| Filter Check | Yes |
| 24 Hour On/Off Timer | Yes |
| Clean Air Ionizer | Yes |
| Remote Control | Full-Function Remote T'Stat |
| Air CFM (High/Med/Low) | 500/491/449 |
| Air Direction Control | Auger Multi-Direction |
| Fresh Air/Exhaust Vent/Closed | Yes/Yes/Yes |
| Filter Type | Antimicrobial Mesh |
| Filter Access | Tilt-Out |
| Slide-Out Chassis | Yes |
| Cabinet Louvers | Yes |
| Rear Grille | Yes |
| Window Mounting Kit (Included) | Pleated Quick Mount |
| Certifications | |
| ENERGY STAR® | Yes |
| Performance | AHAM |
| Specifications | |
| Refrigerant | R410a |
| Shipping Weight (Approx.) | 135 Lbs. |

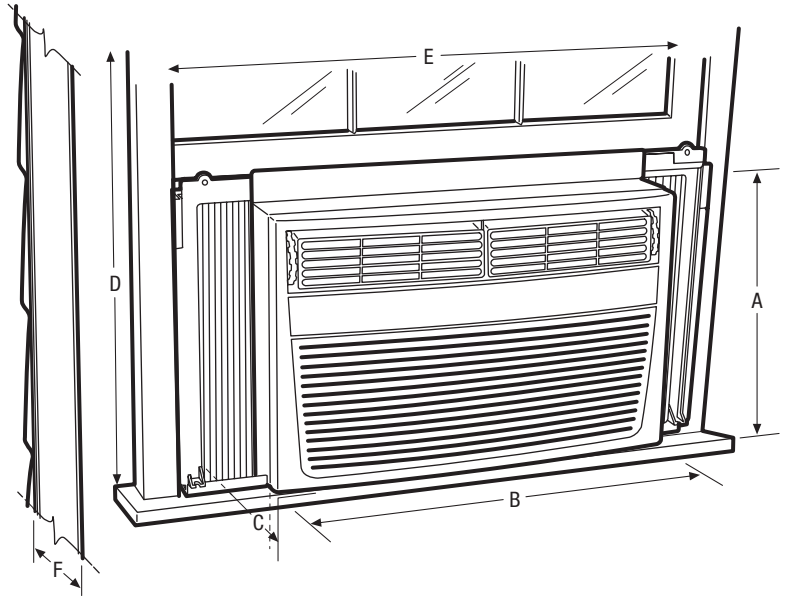

*Plug Type (NEMA)
(B) 6-15P

NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



| Product Dimensions | |
|--------------------|---------|
| A - Height | 18-5/8" |
| B - Width | 26-1/2" |
| C - Depth | 26-1/2" |

| Window Dimensions | |
|-------------------------|-----------|
| D - Height (Min.) | 19-1/2" |
| E - Width (Min./Max.) | 31" / 42" |
| Wall Cutout Dimensions | |
| F - Max. Wall Thickness | 10" |
| Height | 18-5/16" |
| Width | 26-3/4" |

Accessories information available on the web at frigidaire.com